

OMNIBIN



FARMING THE FUTURE

Omnibin OB320

Seeding

- » One person operation
- » No tipping up or over in paddocks
- » Blending different commodities
- » Self-cleaning for no contamination
- » Remote control operation

Harvest

- » Fast unload 6t/min
- » Cart your grain with the same bin & trailer to silos or grain receival point
- » Convenient rear delivery

Other

- » Use for sheep feed-out
- » Light tare weight
- » Easily mounted on Skel trailer
- » Less trailers – save on registration costs
- » Save on insurance – no tipping required

STANDARD features

- | | |
|---|--|
| » Full length 'Quickclean' contamination free conveyor belt | » Up to 6 t/min unload capacity |
| » Front and rear ladders | » Internal steps |
| » Powder coated finish | » Heavy construction chassis |
| » Non-oversize | » Roll-top tarp with splined tightener |
| | » Remote control operation |



Filling an OmniBin at the silos



OB200



OB320



OB400


IT JUST KEEPS GETTING BETTER...

- » Skel trailer mount for greater capacity
- » Self contained stationary engine drive
- » Swinging air-seeder filling conveyor
- » Jack storage
- » Custom sizes available



OTHER OPTIONS INCLUDE:

- » CAMERA KIT
Cameras mounted in each bin and at the rear of the omnibin for full visual coverage.
- » WORK LIGHT KIT
Lights mounted in each bin, down the side and at the rear of the omnibin allowing for safe filling at night.

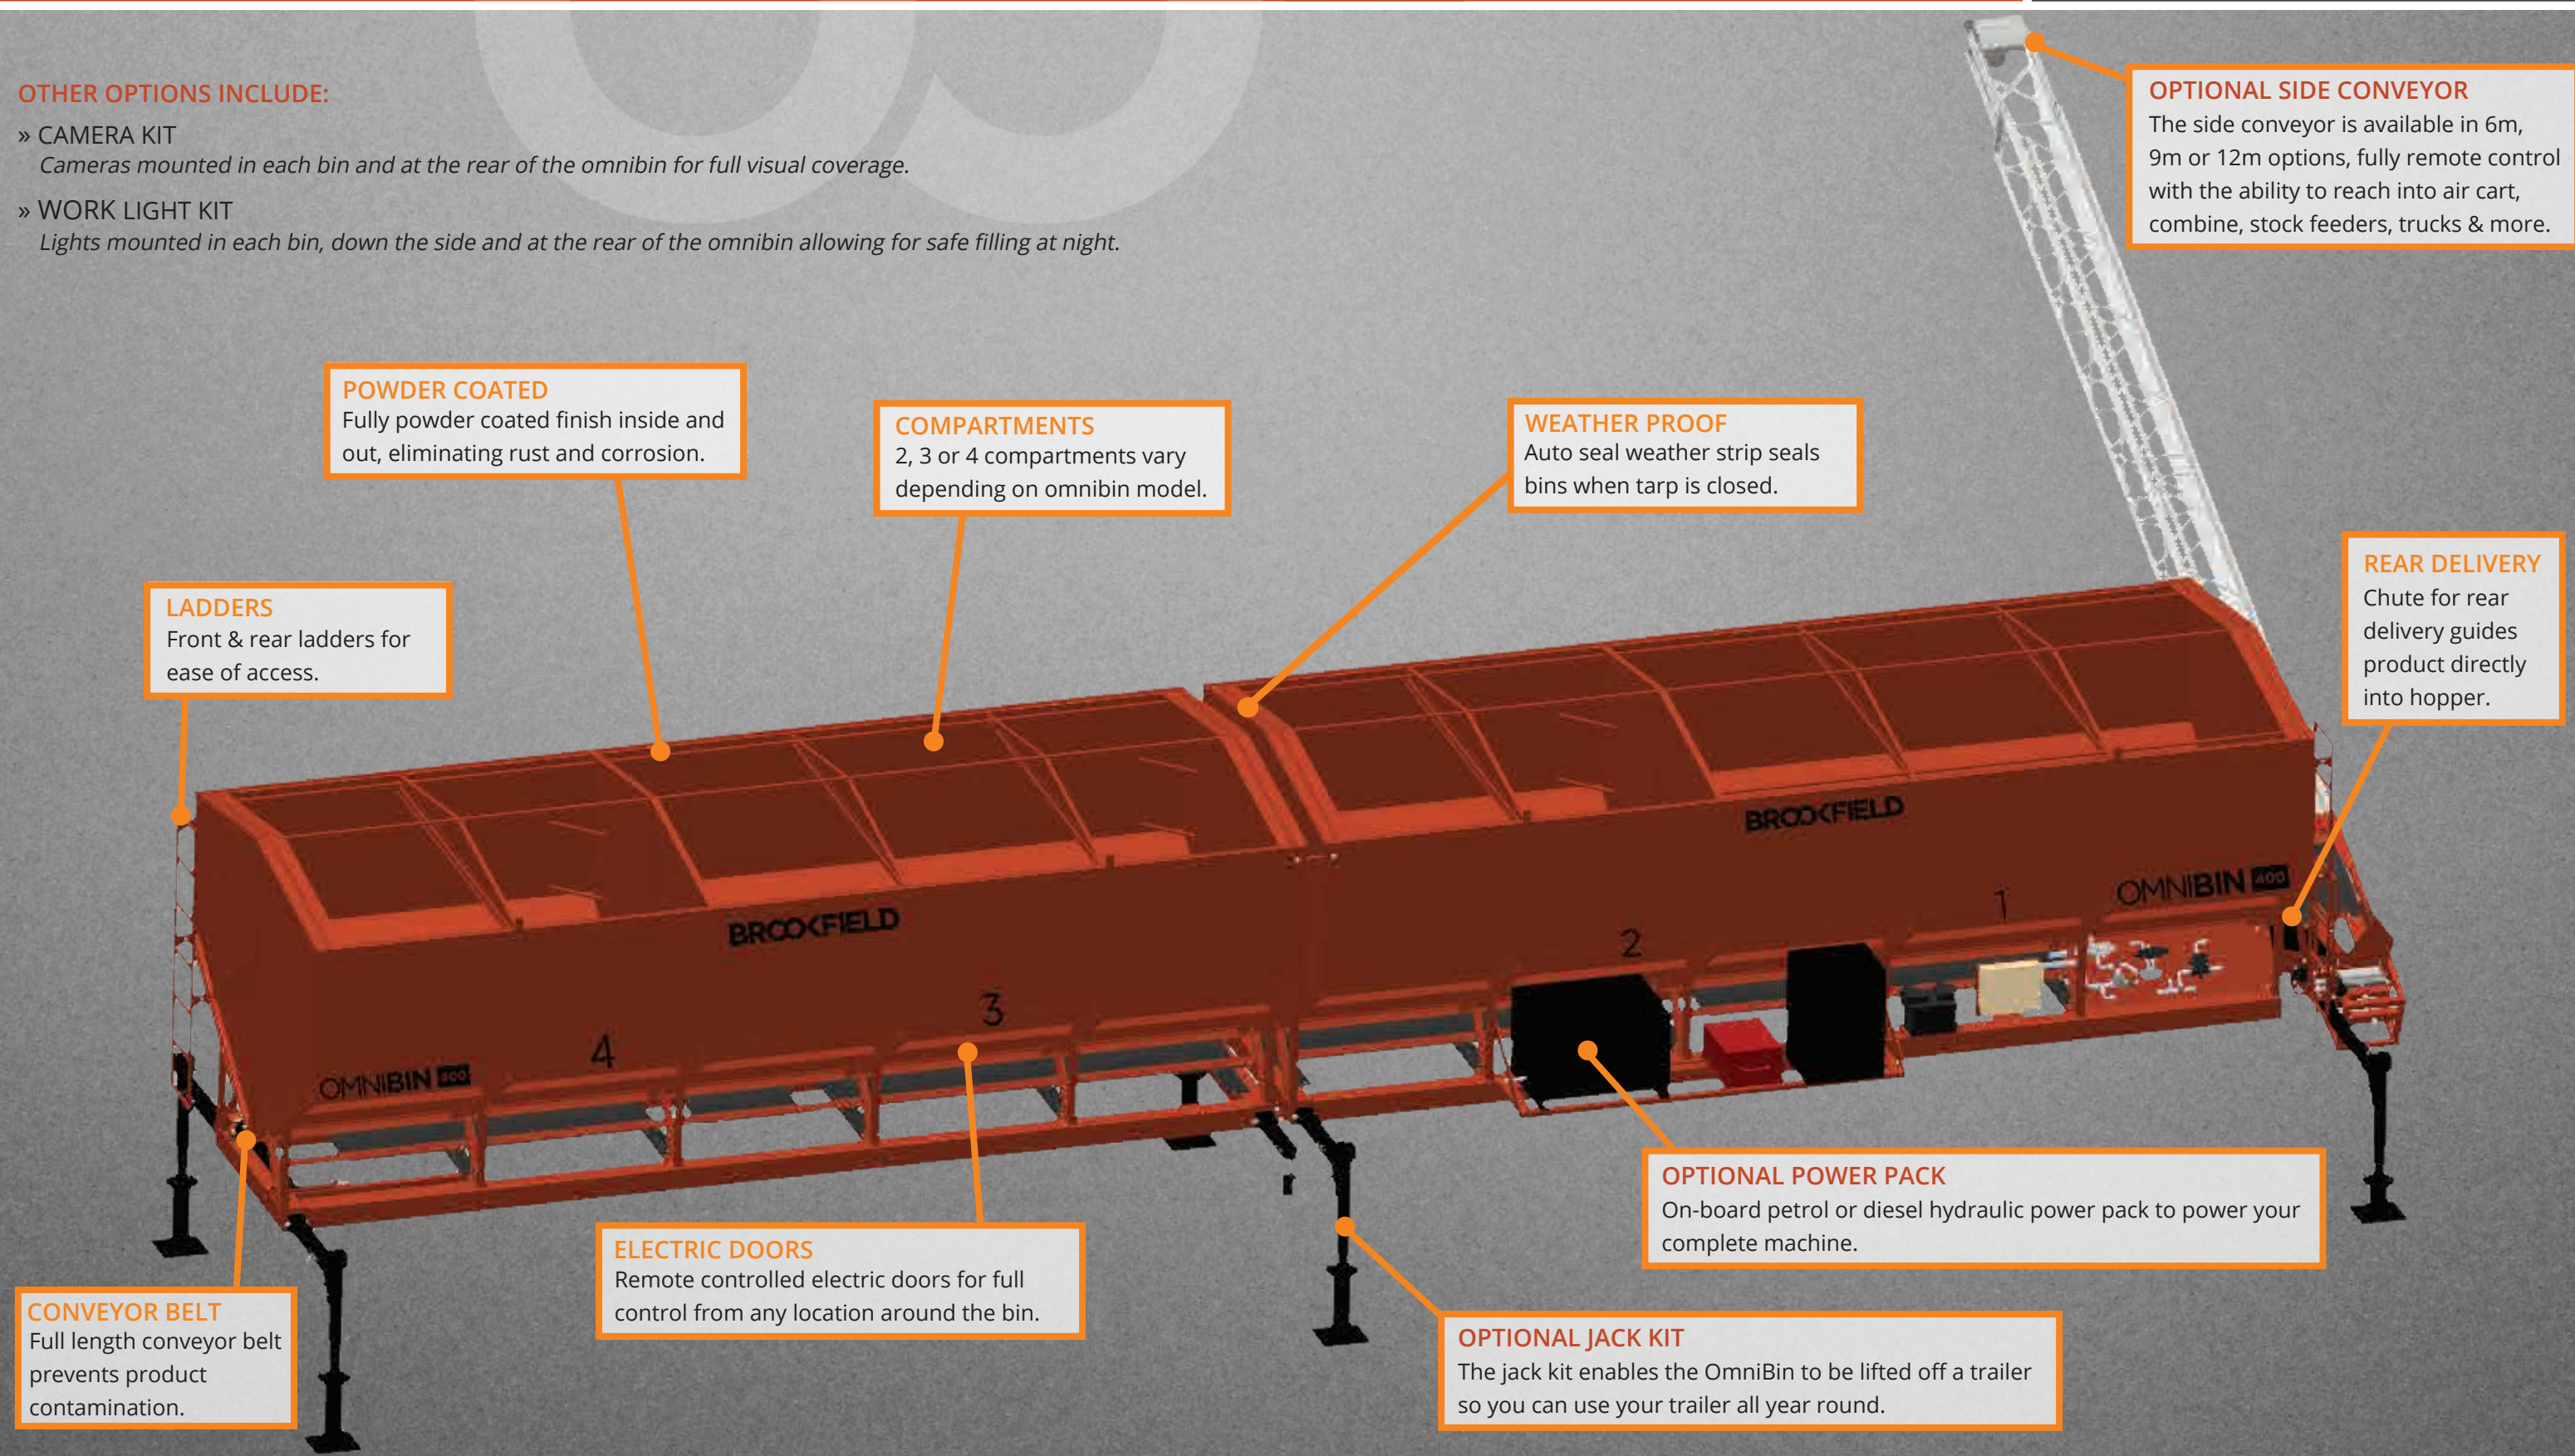

CONVEYOR BELT
Full length conveyor belt prevents product contamination.

LADDERS
Front & rear ladders for ease of access.

POWDER COATED
Fully powder coated finish inside and out, eliminating rust and corrosion.

COMPARTMENTS
2, 3 or 4 compartments vary depending on omnibin model.

WEATHER PROOF
Auto seal weather strip seals bins when tarp is closed.

OPTIONAL SIDE CONVEYOR
The side conveyor is available in 6m, 9m or 12m options, fully remote control with the ability to reach into air cart, combine, stock feeders, trucks & more.

REAR DELIVERY
Chute for rear delivery guides product directly into hopper.

ELECTRIC DOORS
Remote controlled electric doors for full control from any location around the bin.

OPTIONAL POWER PACK
On-board petrol or diesel hydraulic power pack to power your complete machine.

OPTIONAL JACK KIT
The jack kit enables the OmniBin to be lifted off a trailer so you can use your trailer all year round.



OPTIONAL HYDRAULIC DRIVE



OPTIONAL JACK KIT



OPTIONAL PETROL OR DIESEL POWER



OPTIONAL WIRELESS REMOTE
CONTROLLED ELECTRIC DOORS



OPTIONAL MICROSWITCH



OPTIONAL SUPERVEYOR



OPTIONAL LIGHT KIT



OPTIONAL SIDE CONVEYOR

		OB200	OB320	OB400
LITRES		20 000	32 000	40 000
CAPACITY	BIN 1	COMPARTMENT 1 - 12 000	COMPARTMENT 1 - 12 000	COMPARTMENT 1 - 12 000
		COMPARTMENT 2 - 8 000	COMPARTMENT 2 - 8 000	COMPARTMENT 2 - 8 000
	BIN 2	N/A	COMPARTMENT 3 - 12 000	COMPARTMENT 3 - 12 000
		N/A	N/A	COMPARTMENT 4 - 8 000
TONNES (AV. WHEAT)		15.5	25	31
TONNES (AV. FERTILISER)		20	32	40
COMPARTMENTS		2	3	4
STANDARD DRIVE		KOHLER CH270		
OPTIONAL DRIVE		HONDA GX160		
		HYDRAULIC DRIVE*		
DIMENSIONS (MM)	LENGTH	6 875	10 730	13 250
	WIDTH	2 450	2 450	2 450
	HEIGHT	2 200	2 200	2 200
TRAY LENGTH REQUIRED		6.3M/21FT	10.1M/34FT**	12.6M/42FT**
TARE WEIGHT (KG)		1 900	2 800	3 800

SIDE CONVEYOR MODEL FOR ALL SIZED OMNIBIN'S	OBSC60	OBSC90	OBSC120
HEIGHT	2.7M	3.9M	5.0M
*BASED ON A 1.2M TRAY HEIGHT			
REACH	3.4M	6.0M	9.0M

* REQUIRED WITH AUGER AND SIDE CONVEYOR

** ADDITIONAL 250MM REQUIRED FOR TRAILERS WITH A HEAD BOARD

NOTE: DOUBLE LINE INDICATES BIN SPLIT

The background of the logo features two large, overlapping circles in a medium gray shade. The word "BROOKFIELD" is written in a bold, white, sans-serif font across the center of these circles. Below it, the tagline "FARMING THE FUTURE" is written in a smaller, white, sans-serif font.

BROOKFIELD[®]

FARMING THE FUTURE

1800 774 274

www.brookfield.net.au

sales@brookfield.net.au