

OMNIBIN

MINI RANGE



FARMING THE FUTURE

Omnibin OB90



Refilling feeders with the OB90 OmniBin



OB90 OmniBin fitted with a 6m side conveyor

- » Highly versatile commodity bin
- » Ability to handle seed and fertiliser at sowing time as well as stock feed and grain all year round
- » The safest, cleanest and simplest bin available



STANDARD features

- » One person operation
- » Blending different commodities
- » Powder coated finish
- » Self-cleaning - no contamination
- » Grain, stock feed, pellets & more
- » Side delivery feed out conveyor
- » Full discharge conveyor belt system
- » Easily mounted on Skel trailer, chassis or optional single or dual axle trailer
- » Light tare weight

IT JUST KEEPS GETTING BETTER...

- » Optional Heavy duty trailer with single or dual axle
- » Optional roll-over tarp
- » Optional load cells and remote control
- » Customised compartments
- » Available in 6, 9, 12 or 15 cubic metre



OTHER OPTIONS INCLUDE:

- » ROLL TOP TARP
- » WORK LIGHTS KIT
- » TAIL LIGHTS KIT

POWDER COATED
Fully powder coated finish inside and out, eliminating rust and corrosion.

CLEAN DESIGN
Clean internal bin design eliminates hanging points allowing 100% clean out.

COMPARTMENTS
2 compartments for multiple products and blending.

WEATHER PROOF
Auto seal weather strip seals bins when tarp is closed.

LADDER
Rear ladder fitted with slam latch for safe transport.

SIDE CONVEYOR
The 6m side conveyor is operated hydraulically from inside the tractor cab.


OPTIONAL ELECTRIC DOORS
Remote controlled electric doors for full control from any location around the bin.

OPTIONAL TRAILER
Heavy duty trailer with reversible drawbar to suit your delivery requirements.

OPTIONAL AXLES
Single or dual sliding axle trailer to suit your farm needs and tractor size.

OPTIONAL LOAD CELLS
Weigh or measure product discharge with large inside or outside display.

CONVEYOR BELT
Full length conveyor belt prevents product contamination.

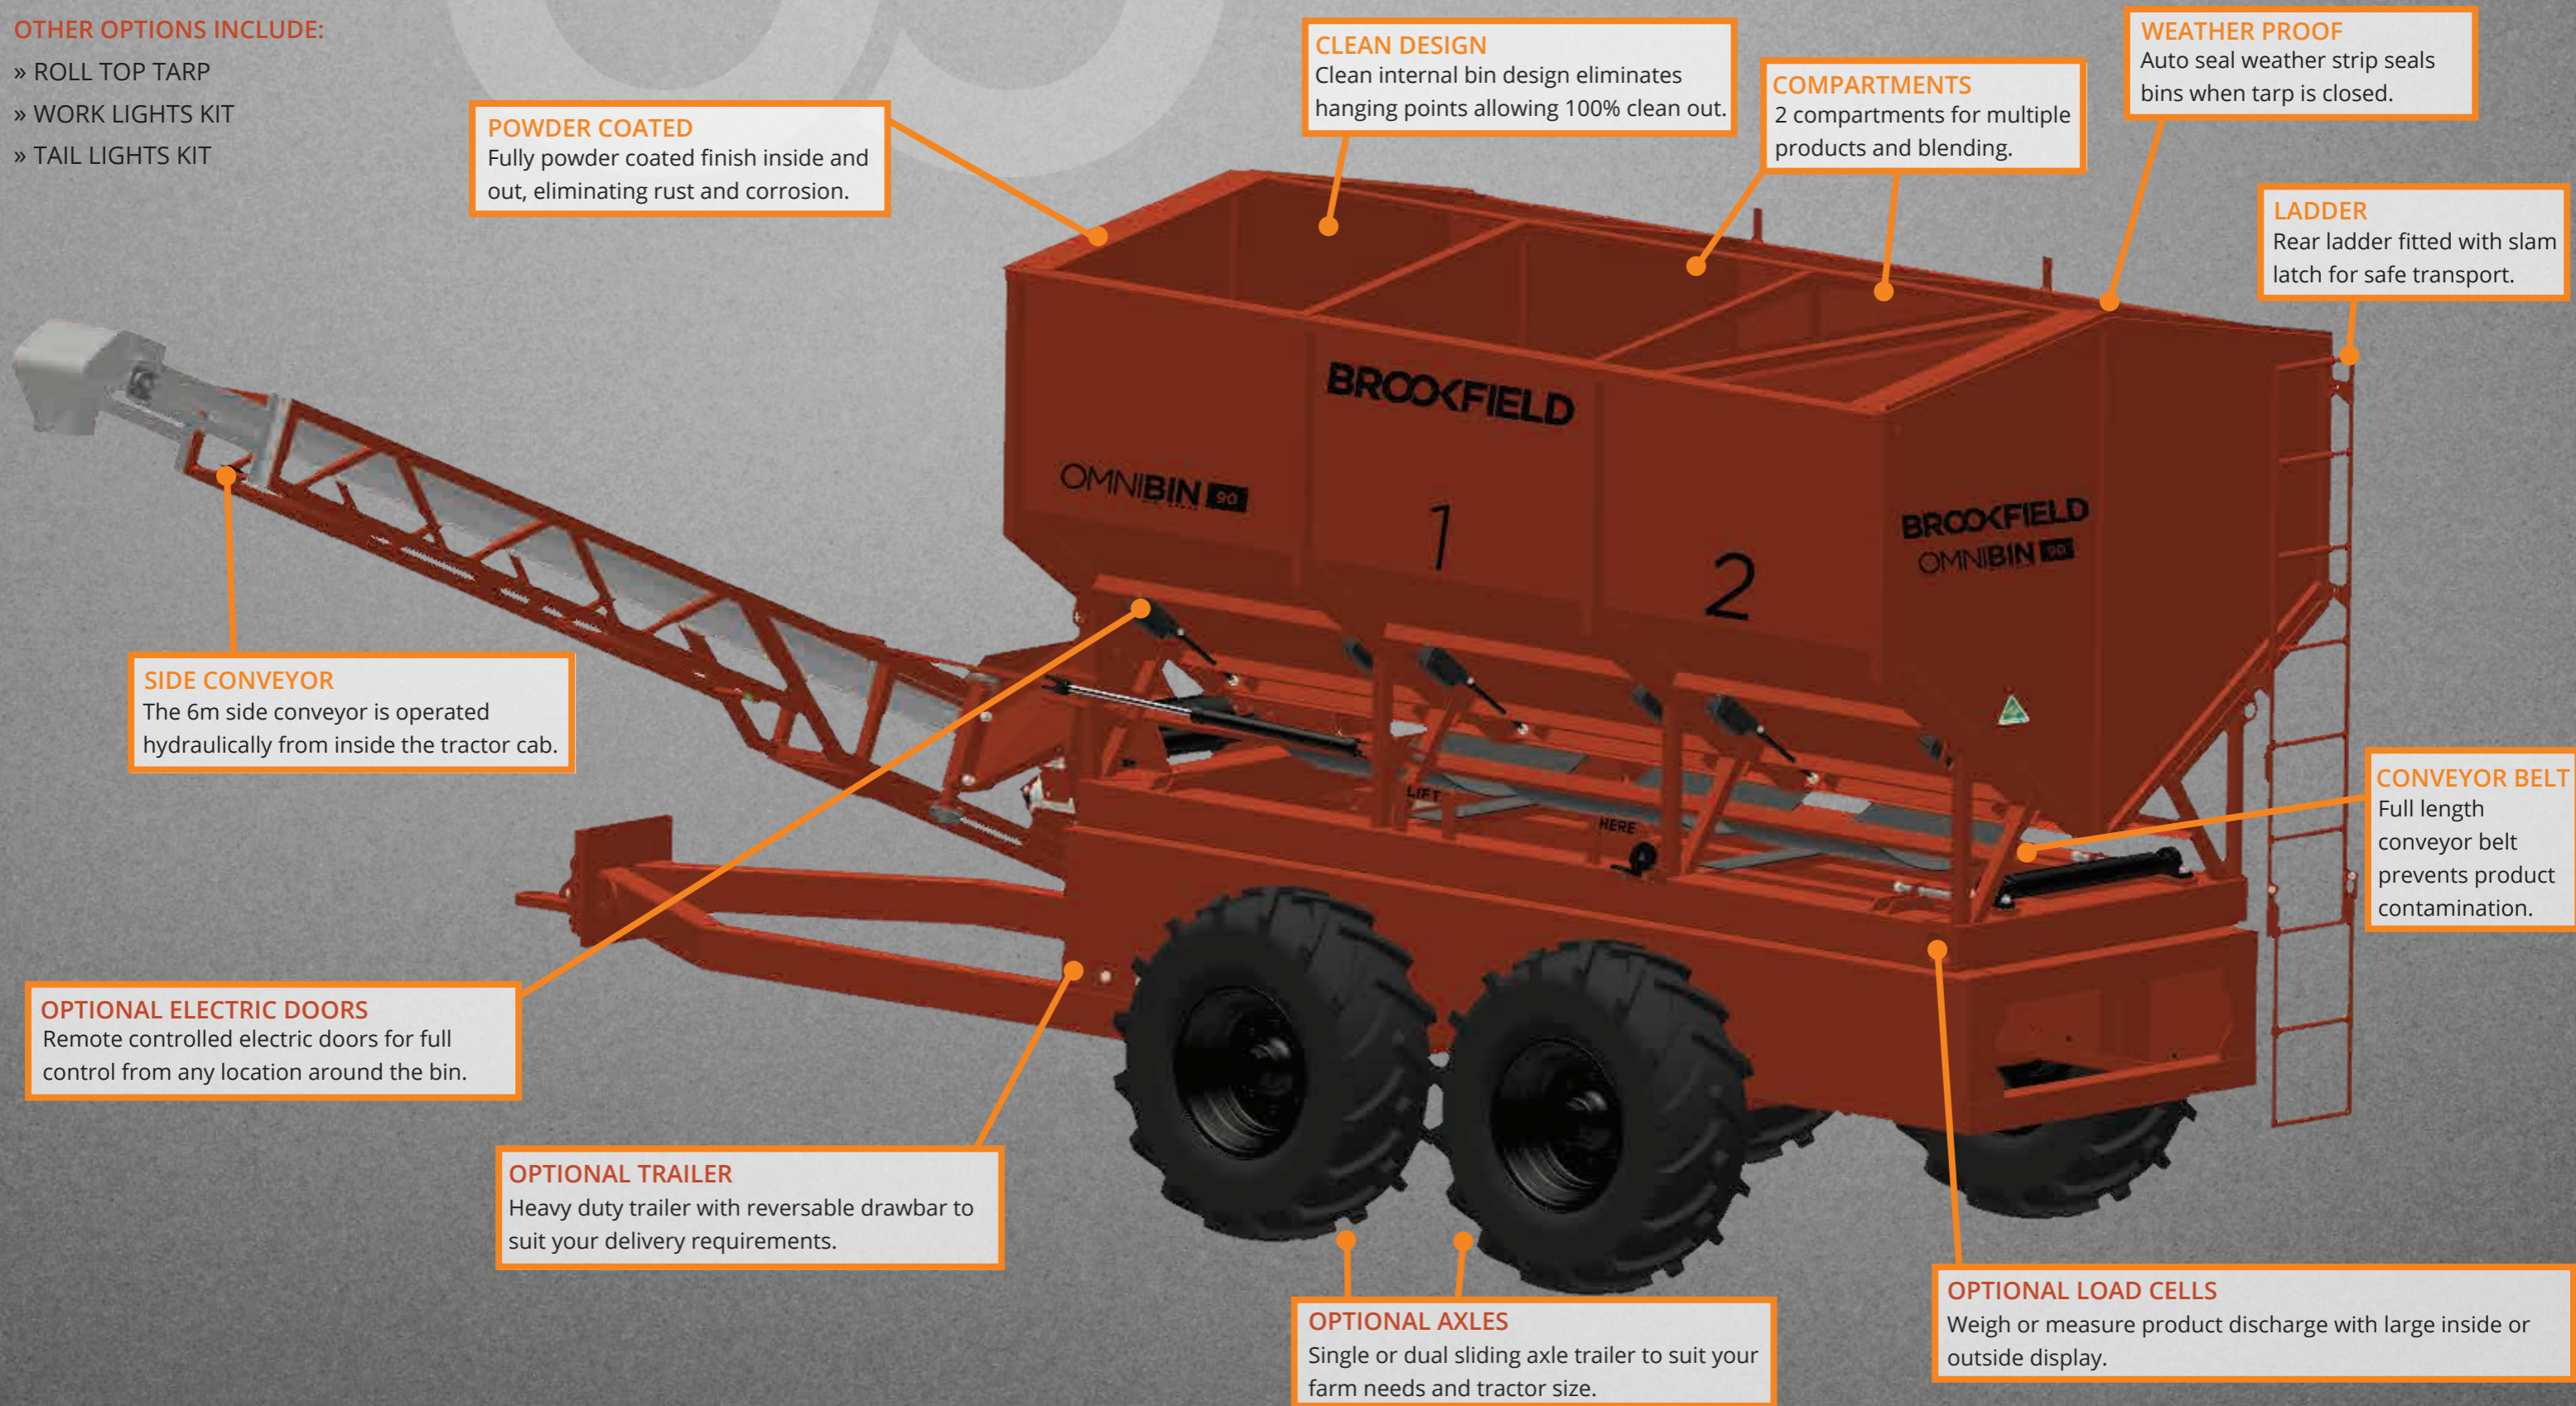

OMNIBIN MINI RANGE MODELS & SPECIFICATIONS



STANDARD FULL LENGTH CONVEYOR



STANDARD 6M SIDE CONVEYOR



STANDARD HYDRAULIC DRIVE



STANDARD FULLY POWDER COATED



OPTIONAL ROLL TOP TARP



OPTIONAL HEAVY DUTY TRAILER



OPTIONAL LOAD CELLS



OPTIONAL REMOTE CONTROLLED

	OB60	OB90	OB120	OB150	
LITRES	6 000	9 000	12 000	15 000	
COMPARTMENTS	2	2	2	2	
CAPACITY <i>*CAN BE MODIFIED</i>	COMPARTMENT 1	3 000	6 000	9 000	
	COMPARTMENT 2	3 000	3 000	3 000	
TONNES (AV. WHEAT/UREA)	4.5	7	9	11.5	
TONNES (AV. FERTILISER)	6	9	12	15	
STANDARD DRIVE	HYDRAULICS FROM TRUCK OR TRACTOR				
OPTIONAL DRIVE	HYDRAULICS FROM ON BOARD POWER PACK				
DIMENSIONS (MM) <i>*MOUNTED ON CHASSIS</i>	LENGTH	5 700	6 900	8 200	9 400
	WIDTH	2 500	2 500	2 500	2 500
	HEIGHT	3 100	3 100	3 100	3 100
DIMENSIONS (MM) <i>*BIN ONLY</i>	LENGTH	3 200	4 400	5 700	6 900
	WIDTH	2 300	2 300	2 300	2 300
	HEIGHT	2 000	2 000	2 000	2 000
TRAY LENGTH REQUIRED	2.6M/8.5FT**	3.8M/12.5FT**	5.1M/16.7FT**	6.3M/20.7FT**	
TARE WEIGHT (KG)	950	1 400	1 850	2 300	
CONVEYOR OVERHANG	1 400	1 400	1 400	1 400	

** ADDITIONAL 250MM REQUIRED FOR TRAILERS WITH A HEAD BOARD

SIDE CONVEYOR MODEL	OBSC60-MR
HEIGHT <i>*BASED ON A CHASSIS HEIGHT OF 1.1M</i>	2.5M
REACH	3.5M





BROOKFIELD[®]
FARMING THE FUTURE

1800 774 274

www.brookfield.net.au

sales@brookfield.net.au